



09-75-005 30W

Parameter:

- Part Number: **09-75-005**
- Light source: Epistar LED or B ridgeLux LED
- Power: 30W
- Work voltage: AC (85 V -26 5V) /(50- 60HZ) or 12 V/24 V DC
- Power factor (PF): >0.9
- Light efficiency: >90 lm/w
- Lumens: >2700 LM
- No UV or IR light radiation
- Fixture efficiency: >90%
- **View angle: 90°**
- Color instruction: >80
- Color temperature (CC T): 2700-7000K
- Life time: >50,000 hrs
- Luminance decrease: keep lighting 1000 hours decrease 1%
- IP grade: IP6 5
- CE certification
- Net weight: 3.5 kg
- Dimension of the product: 225 * 185 * 130 mm



Typical Applications:

- Security area lighting
- Signs and billboards
- Pathways and driveways




09-75-005 30W

Product Dimensions:

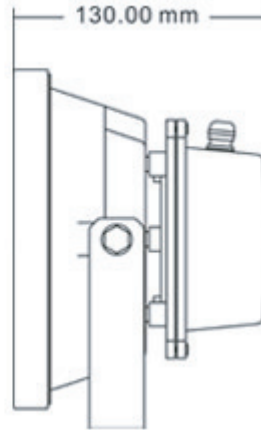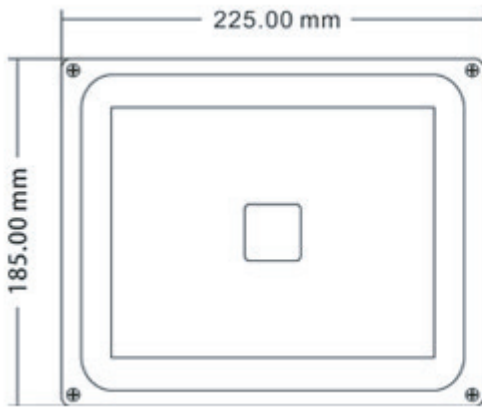

Photometric Results:

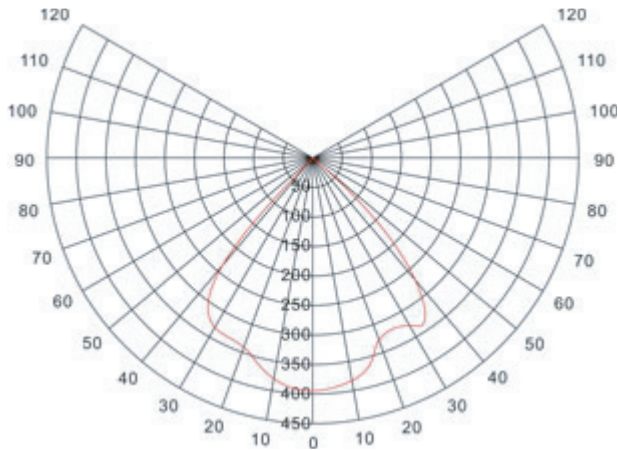

Illuminance Measurement:

