

ÉNERGIE MATRIX ENERGY

▶ Deka Valve-Regulated Gelled-Electrolyte

Features

- ▶ Valve-regulated...
- ▶ Gelled electrolyte...
- ▶ Compu-cast, power path grids and computer-controlled oxide...
- ▶ Low stand loss...
- ▶ Individual plate formation...
- ▶ Rated non-spillable by ICAO, IATA and DOT...
- ▶ Made in the U.S.A...

Benefits

- ▶ Sealed construction eliminates periodic watering, corrosive acid fumes and spills.
- ▶ Electrolyte will not stratify. No equalization charging required.
- ▶ Increases durability and deep cycle ability for heavy demand applications.
- ▶ Less than 2% per month stand loss means little deterioration during transport and storage.
- ▶ Ensure voltage matching between cells.
- ▶ Transports easily and safely by air. No special containers needed.
- ▶ Ensures reliable service, support and quality.



Solar Photovoltaic Batteries

The Deka Solar series of valve-regulated, gelled-electrolyte batteries is designed to offer reliable, maintenance-free power for renewable energy applications where frequent deep cycles are required and minimum maintenance is desirable.


Applications

Water pumping • Residential • Communications
Cathodic protection • Remote monitoring • Refrigeration
Lighting • Aids to navigation • Wind generation

Specifications

Voltage 12 volts nominal (8GGC2 is 6 volts)
Plate alloy Lead calcium
Element, post Threaded stud or "flag" terminal, forged bushing
Container/cover Polypropylene
Electrolyte Sulfuric acid thixotropic gel
Vent Self sealing

Gel Cycle Life vs Depth of Discharge at +25°C (77°F)*
Based on BCI 2-hour Capacity

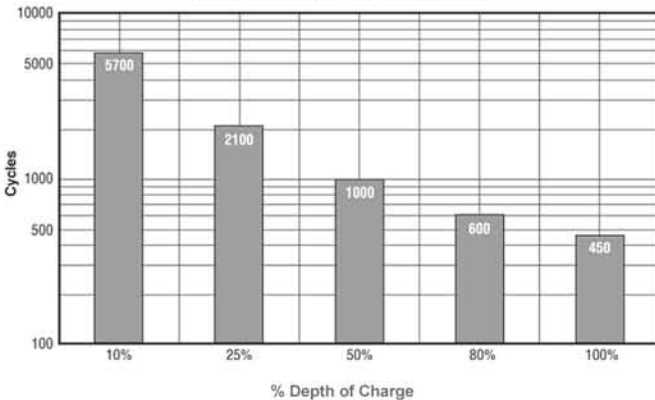


Cycle Chart applies to types with similar design characteristics, ex., U1, 22NF, 24, 27, 31.

The solar battery excels in cycling applications.
*Dependent upon proper charging and ambient temperatures.

Photovoltaic Charging Parameters		
Bulk Charge	Max Current (amps)	30% of 20 Hr Rate
Absorption (Regulation) Charge	Constant Voltage	2.35 - 2.40 vpc
Float Charge	Constant Voltage	2.25 - 2.30 vpc
Equalize Charge	Constant Voltage	2.40 - 2.45 vpc
Temperature Coefficient	0.005 mv / °C	

Cut-off parameters per charge & equalize intervals are application specific and will vary dependent upon site specific characteristics such as temperature, days of autonomy, array to load ratio, ect.

Capacity vs. Operating Temperature

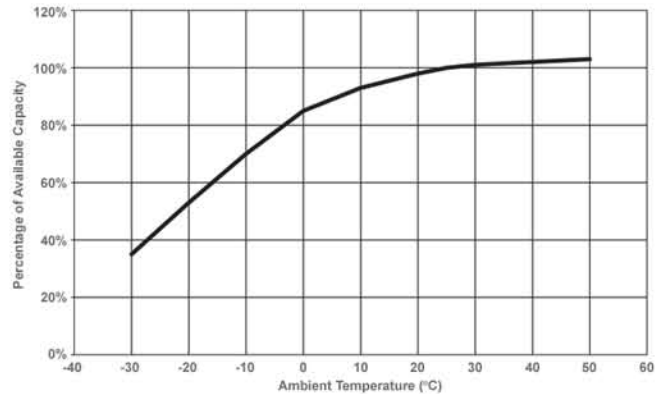

Capacity vs. Operating Temperatures: Above are the changes in capacity for wider ambient temperature range, giving the available capacity, as a percentage of the rated capacity, at different ambient temperatures. The curves show the behavior of the battery after a number of cycles.

Terminal Information



Type No.	Footnotes	Volts	Discharge Amps per unit to 1.75VPC at 77°F (25°C)													Approx. Wt. Lbs. (Kgs.)	Dimensions In (mm)			
			5 Min	10 Min	15 Min	20 Min	30 Min	60 Min	90 Min	3 Hr	6 Hr	8 Hr	20 Hr	24 Hr	48 Hr		100 Hr	L	W	H
8GU1	4,Y	12	74.7	54.3	44.6	38.8	31.9	21	15	8.50	4.67	3.56	1.58	1.33	0.73	0.36	23.4 (10.6)	7 3/8 (197)	5 1/2 (130)	7 1/4 (184)
8GU1H	4,17,Y	12	74.7	54.3	44.6	38.8	31.9	21	15	8.50	4.67	3.56	1.58	1.33	0.73	0.36	23.4 (10.6)	8 5/8 (211)	5 1/2 (130)	7 1/4 (184)
8G22NF	4,G	12	120	86.7	69.1	60	47	31.8	23.2	13.30	7.65	5.74	2.55	2.15	1.16	0.58	37 (16.8)	9 1/2 (238)	5 1/2 (140)	9 1/4 (235)
8G24	4,17,G	12	204	152	119	100	78	48.5	35	19.77	10.75	8.30	3.68	3.12	1.68	0.845	52 (23.6)	10 1/2 (276)	6 3/4 (171)	9 1/4 (235)
8G27	4,17,G	12	242	185.3	142.5	118.8	90.25	57	41.5	23.30	12.67	9.80	4.32	3.67	1.99	0.99	62.7 (28.4)	12 1/2 (324)	6 3/4 (171)	9 1/4 (235)
8G30H	4,17,B	12	266	199.5	161.5	137.8	104.5	64.5	47	26.20	14.20	11.00	4.88	4.10	2.15	1.08	69.5 (31.5)	12 1/2 (329)	6 3/4 (171)	9 1/4 (248)
8G31	4,X	12	266	199.5	161.5	137.8	104.5	64.5	47	26.20	14.20	11.00	4.88	4.10	2.15	1.08	69.5 (31.5)	12 1/2 (329)	6 3/4 (171)	9 1/4 (238)
8GGC2	4,17,GH	6	325	250	210	180	150	99	76	45.30	25.80	20.00	9.00	7.60	3.90	1.98	68.4 (31.0)	10 1/2 (260)	7 1/2 (181)	11 (279)
8G4D	4,17	12	485	375	300	255	195	122	88	49.20	26.70	20.70	9.15	7.78	4.22	2.10	127 (57.5)	20 1/2 (527)	8 1/2 (216)	10 (254)
8G8D	4,17	12	600	460	370	315	245	150	105	60.60	33.00	25.50	11.25	9.54	5.18	2.65	157 (71.1)	20 1/2 (527)	11 (279)	10 (254)

ALL RATINGS ARE AFTER 15 CYCLES AND CONFORM TO B.C.I. SPECIFICATIONS.
IMPORTANT CHARGING INSTRUCTIONS: WARRANTY VOID IF OPENED OR IMPROPERLY CHARGED. Do not install in a sealed container. Constant under or overcharging will damage any battery and shorten its life! Use a good constant potential, voltage-regulated charger. The open circuit voltage of a fully charged 12-volt battery is 12.8V at 68°F (20°C).

Footnotes:
G - Offset post w/ horizontal hole, stainless steel 5/16" bolt & hex nut
H - Includes handles
S - SAE "automotive type" post

X - 3/8" x 16 stainless steel stud posts
Z - Terminals have round holes

Batteries manufactured in polypropylene cases and covers.

Matrix Energy Inc.

296 Labrosse Avenue, Pointe-Claire, QC H9R 5L8

Telephone: (514) 630-5630 | Toll Free: 1-866-630-5630

Fax: (514) 426-9123 | www.matrixenergy.ca

Warranty: one year free replacement